

WE CONTROL
AIR



BETA
industrial
PRODUCTS CATALOGUE

PRODUCT BULLETIN

8

Ver. 03 Apr 2025





BETA
i n d u s t r i a l

index

>> VOLUME CONTROL DAMPER - 3VCD SERIES		I-4
>> VOLUME CONTROL DAMPER - AVCD SERIES		5-9
>> LOW-LEAKAGE VOLUME CONTROL DAMPER - LVCD SERIES		10-12
>> ROUND VOLUME CONTROL DAMPER - VDR SERIES		13-15
>> BACK DRAFT DAMPER - NRD SERIES		16-17
>> BACK DRAFT DAMPER - PRD SERIES		18-19
>> BACK DRAFT DAMPER - MPRD SERIES		20-21
>> ACCESS DOORS		22-23

Note: AMCA certified products are available at AMCA directory of listed products at <http://www.amca.org/certified-listed/listedproducts.php>



VOLUME CONTROL DAMPER - 3VCD SERIES 3V-SHAPED STEEL BLADES

STANDARD CONSTRUCTION

Frame: 1.2mm thick galvanized steel sheet.

Blades: 3 V-shaped 1.2mm thick roll-formed galvanized steel.

Axles: ½" square galvanized steel rod.

Linkage: made of galvanized steel.
Concealed in frame.

Bushing: Self lubricating plastic nylon bushes.

Quadrant: Plated steel with wing nut to lock the blades position. Marked to show the position of the blades.

Fixing to duct: Flanged frame.

Single section minimum size:

100X100mm for Flanged/Box/Slip & clip types.


100X150mm for Hat-shaped type.

Single section maximum size:

1200X1200mm for Hat-shaped/Flanged types.

1000X1000mm for Slip & clip/Box types.


Model 3VCDG2PLF

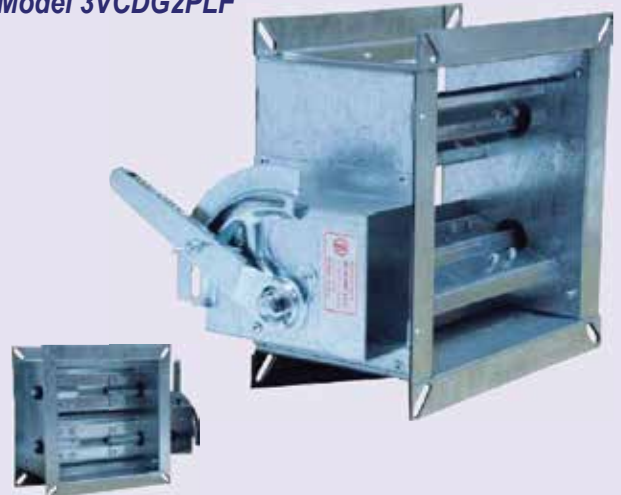


Model 3VCDG2PLH




DIMENSIONS

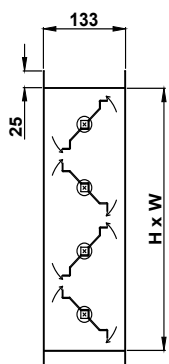


3VCD-Flange type

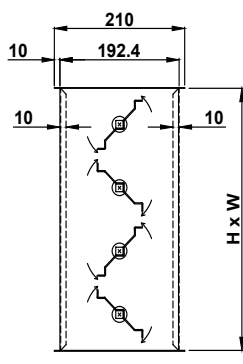


3VCD-Slip & Clip type

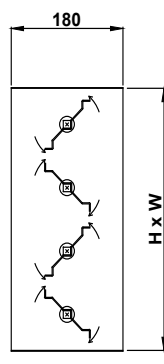

3VCD-Box type

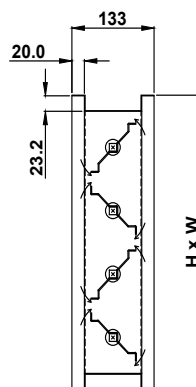

3VCD-Hat type

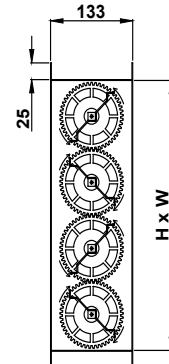

3VCD with gear mechanism



Plastic Bushes






VOLUME CONTROL DAMPER - 3VCD SERIES


3V-SHAPED STEEL BLADES

OPTIONS



FEATURE	MODEL	MANUAL QUADRANT MODELS																			
		3VCDG2PLH	3VCDG2BLH	3VCDG2PLF	3VCDG2BLF	3VCDG2PLS	3VCDG2BLS	3VCDG2PLB	3VCDG2BLB	3VCDG2PGH	3VCDG2BGH	3VCDG2PGF	3VCDG2BGF	3VCDG2PGS	3VCDG2BGS	3VCDG2PGB	3VCDG2BGB	3VCDG2SLH	3VCDG2SLF	3VCDG2SLS	3VCDG2SLB
DRIVE	MANUAL QUADRANT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ELECTRIC ACTUATOR																				
BLADE TYPE	G.I. 3V-SHAPED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ALUMINUM AEROFOIL																				
BLADE MOVEMENT	OPPOSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PARALLEL	ABOVE MODELS (EXCEPT THE ONES WITH GEAR MECHANISM) CAN BE WITH PARALLEL BLADES, PLS. WRITE "PARALLEL" ON YOUR ORDER																			
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUT OFF)																				
CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL 304																	✓	✓	✓	✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓		✓		✓		✓		✓		✓		✓		✓					
	BRASS BUSHES		✓		✓		✓		✓		✓		✓		✓		✓				
	S.S. BEARING																✓	✓	✓	✓	✓
MECHANISM	G.I. LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓	✓								✓	✓	✓	✓
	PLASTIC GEARS											✓	✓	✓	✓	✓	✓			✓	✓
FIXING TO DUCT	HAT-SHAPED	✓	✓							✓	✓							✓			✓
	FLANGE			✓	✓							✓	✓					✓			✓
	SLIP & CLIP					✓	✓							✓	✓					✓	
	BOX TYPE (INSERTED INSIDE DUCT)							✓	✓							✓	✓				✓

**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.



FEATURE	MODEL	MOTORIZED MODELS																			
		M3VCDG2PLH	M3VCDG2BLH	M3VCDG2PLF	M3VCDG2BLF	M3VCDG2PLS	M3VCDG2BLS	M3VCDG2PLB	M3VCDG2BLB	M3VCDG2PGH	M3VCDG2BGH	M3VCDG2PGF	M3VCDG2BGF	M3VCDG2PGS	M3VCDG2BGS	M3VCDG2PGB	M3VCDG2BGB	M3VCDG2SLH	M3VCDG2SLF	M3VCDG2SLS	M3VCDG2SLB
DRIVE	MANUAL QUADRANT																				
	ELECTRIC ACTUATOR	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BLADE TYPE	G.I. 3V-SHAPED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ALUMINUM AEROFOIL																				
BLADE MOVEMENT	OPPOSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PARALLEL	ABOVE MODELS (EXCEPT THE ONES WITH GEAR MECHANISM) CAN BE WITH PARALLEL BLADES, PLS. WRITE "PARALLEL" ON YOUR ORDER																			
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUT OFF)																				
CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL 304																	✓	✓	✓	✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓		✓		✓		✓		✓		✓		✓		✓					
	BRASS BUSHES		✓		✓		✓		✓		✓		✓		✓		✓				
	S.S. BEARING																✓	✓	✓	✓	✓
MECHANISM	G.I. LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓	✓								✓	✓	✓	✓
	PLASTIC GEARS											✓	✓	✓	✓	✓	✓			✓	✓
FIXING TO DUCT	HAT-SHAPED	✓	✓							✓	✓							✓			✓
	FLANGE			✓	✓							✓	✓							✓	
	SLIP & CLIP					✓	✓							✓	✓					✓	
	BOX TYPE (INSERTED INSIDE DUCT)							✓	✓							✓	✓				✓

**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.





VOLUME CONTROL DAMPER - 3VCD SERIES

3V-SHAPED STEEL BLADES

PERFORMANCE DATA

Beta Industrial LLC certifies that the 3VCD shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings only.

Test Information

- * Air leakage is based on operation between 32 °F and 120 °F
- * Tested for air leakage at standard air density in accordance with ANSI/AMCA Standard 500-D, Figure 5.4
- * Tested for air performance at standard air density in accordance with ANSI/AMCA 500-D, Figure 5.3
- * Data are based on a torque of 21 in-lb/ft² applied to close and seat the damper during the test.



PRESSURE DROP DATA

Size 12" x 12"		Size 24" x 24"		Size 36" x 36"		Size 12" x 48"		Size 48" x 12"	
Air Velocity (fpm)	Pressure Drop (IWG)	Air Velocity (fpm)	Pressure Drop (IWG)	Air Velocity (fpm)	Pressure Drop (IWG)	Air Velocity (fpm)	Pressure Drop (IWG)	Air Velocity (fpm)	Pressure Drop (IWG)
297	0.002	347	0.003	318	0.002	346	0.003	346	0.003
730	0.009	749	0.01	747	0.009	756	0.01	754	0.01
976	0.02	999	0.02	995	0.015	1003	0.02	1001	0.02
1466	0.04	1514	0.05	1494	0.034	1520	0.04	1515	0.04
1958	0.08	2008	0.08	1991	0.061	2014	0.07	2007	0.08

AIR LEAKAGE DATA

Size 12" x 48"		Size 24" x 36"		Size 36" x 36"		Size 48" x 36"	
Leakage through face area cfm/ft ²	Pressure Drop (IWG)	Leakage through face area cfm/ft ²	Pressure Drop (IWG)	Leakage through face area cfm/ft ²	Pressure Drop (IWG)	Leakage through face area cfm/ft ²	Pressure Drop (IWG)
0.3	1.03	10.3	0.109	5.5	0.106	4.6	0.105
0.4	2.063	22.6	0.510	11.5	0.511	10.6	0.514
0.7	4.132	32.7	1.025	15.7	1.025	14.8	1.031
0.7	6.196	46.5	2.063	23.2	2.049	20.6	2.070
0.8	8.265	66.4	4.137	34.4	4.097	26.4	4.137

Maximum Allowable Leakage, cfm/ft²

Pressure Class	1.0" W.G	4" W.G	8" W.G
1A	3	N/A	N/A
1	4	8	11
2	10	20	28
3	40	80	112

	Width	Height
Minimum	4"	4" *
Maximum	48"	48"

* Minimum height for Hat-shaped type is 6"(150mm)

Bulletin No. 8, Oct 2024





VOLUME CONTROL DAMPER - 3VCD SERIES

3V-SHAPED STEEL BLADES

PERFORMANCE DATA

FLANGED TYPE



HAT-SHAPED TYPE




SLIP & CLIP TYPE



BOX TYPE



AIR LEAKAGE DATA

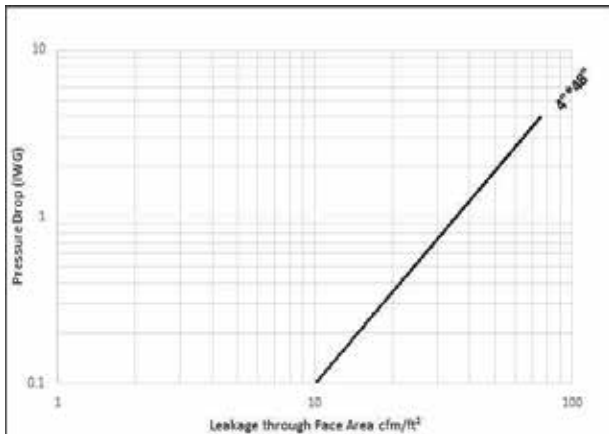

PRESSURE DROP DATA

Size 4" x 48"	
Air Velocity (fpm)	Pressure Drop (IWG)
516	0.034
992	0.130
1482	0.291
1985	0.524
2480	0.819

Tested at AMCA 500-D lab
Arlington Heights, USA



Ordering Key:

M	3	VCD	G2	P	L	F	SIZE
--- : QUADRANT DRIVEN M: MOTORIZED 3: 3V-SHAPED G.I. BLADES VCD: VOLUME CONTROL DAMPER G1: 0.9MM G.I.CONSTRUCTION G2: 1.2MM G.I.CONSTRUCTION G3: 1.5MM G.I.CONSTRUCTION G4: 1.7MM G.I.CONSTRUCTION S1: 1.0MM S.S. 304 CONSTRUCTION S2: 1.2MM S.S. 304 CONSTRUCTION S3: 1.5MM S.S. 304 CONSTRUCTION S4: 1.7MM S.S. 304 CONSTRUCTION P: PLASTIC NYLON BUSHES B: BRASS BUSHES X: S.S. BUSHES S: S.S. BEARINGS L: G.I. LINKAGE MECHANISM G: PLASTIC GEARS MECHANISM H: HAT-SHAPED FRAME F: FLANGED TO DUCT S: SLIP & CLIP WITH DUCT B: BOX TYPE (INSERTED INSIDE DUCT) SIZE: WIDTH X HEIGHT							

Single section minimum size:
100X100mm for Flanged/Box/Slip & clip types.
100X150mm for Hat-shaped types.

Single section maximum size:
1200X1200mm for Hat-shaped/Flanged types.
1000X1000mm for Slip & clip/Box types.





VOLUME CONTROL DAMPER - AVCD SERIES AEROFOIL BLADES

STANDARD CONSTRUCTION

Frame: 1.2mm thick galvanized steel sheet.

Blades: Aerofoil 1.0mm double skin extruded Aluminum profiles/ GI Sheet.

Axles: 1/2" square galvanized steel rod.

Linkage: Made of galvanized steel. Concealed in frame.

Bushing: Self lubricating plastic nylon bushes.

Quadrant: Plated steel with wing nut to lock the blades position. Marked to show the position of the blades.

Fixing to duct: Flanged frame.

Single section minimum size:

100X100mm for Flanged/Box/Slip & clip types.

100X150mm for Hat-shaped type.

Single section maximum size:

1200X1200mm for Hat-shaped/Flanged types.

1000X1000mm for Slip & clip/Box types.

Model A..VCDG2PLF



Model MA..VCDG2PLF



BOX TYPE



S&C TYPE




FLANGED TYPE




HAT-SHAPE TYPE


DIMENSIONS




AVCD-Flange type




AVCD-Slip & Clip type



AVCD-Box type

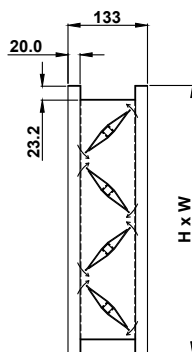

AVCD-Hat type



AVCD with gear mechanism




Plastic Bushes






VOLUME CONTROL DAMPER - AVCD SERIES AEROFOIL BLADES

ALUMINIUM BLADES OPTIONS



FEATURE	MODEL	MANUAL QUADRANT MODELS																			
		AUUCDG2PLH	AUUCDG2BLH	AUUCDG2PLF	AUUCDG2BLF	AUUCDG2PLS	AUUCDG2BLS	AUUCDG2PLB	AUUCDG2BLB	AUUCDG2PGH	AUUCDG2BGH	AUUCDG2PGF	AUUCDG2BGF	AUUCDG2PGS	AUUCDG2BGS	AUUCDG2PGB	AUUCDG2BGB	AUUCDS2SLH	AUUCDS2SLF	AUUCDS2SLS	AUUCDS2BLB
DRIVE	MANUAL QUADRANT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ELECTRIC ACTUATOR																				
BLADE TYPE	G.I. AEROFOIL BLADES																				
	ALUMINUM AEROFOIL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BLADE MOVEMENT	OPPOSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PARALLEL	ABOVE MODELS (EXCEPT THE ONES WITH GEAR MECHANISM) CAN BE WITH PARALLEL BLADES, PLS. WRITE "PARALLEL" ON YOUR ORDER																			
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUT OFF)																				
FRAME CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL 304																✓	✓	✓	✓	✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓		✓		✓		✓		✓		✓		✓		✓					
	BRASS BUSHES		✓		✓		✓		✓		✓		✓		✓		✓				
	S.S. BEARING																✓	✓	✓	✓	✓
MECHANISM	G.I. LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓												
	PLASTIC GEARS											✓	✓	✓	✓	✓				✓	✓
FIXING TO DUCT	HAT-SHAPED	✓	✓						✓	✓							✓				✓
	FLANGE			✓	✓							✓	✓				✓				
	SLIP & CLIP					✓	✓							✓						✓	
	BOX TYPE (INSERTED INSIDE DUCT)							✓	✓							✓					✓

**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.



FEATURE	MODEL	MOTORIZED MODELS																			
		MAUUCDG2PL	MAUUCDG2BLH	MAUUCDG2PLF	MAUUCDG2BLF	MAUUCDG2PLS	MAUUCDG2BLS	MAUUCDG2PLB	MAUUCDG2BLB	MAUUCDG2PGH	MAUUCDG2BGH	MAUUCDG2PGF	MAUUCDG2BGF	MAUUCDG2PGS	MAUUCDG2BGS	MAUUCDG2PGB	MAUUCDG2BGB	MAUUCDS2SLH	MAUUCDS2SLF	MAUUCDS2SLS	MAUUCDS2BLB
DRIVE	MANUAL QUADRANT																				
	ELECTRIC ACTUATOR	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BLADE TYPE	G.I. AEROFOIL BLADES																				
	ALUMINUM AEROFOIL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BLADE MOVEMENT	OPPOSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PARALLEL	ABOVE MODELS (EXCEPT THE ONES WITH GEAR MECHANISM) CAN BE WITH PARALLEL BLADES, PLS. WRITE "PARALLEL" ON YOUR ORDER																			
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUT OFF)																				
FRAME CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL 304																✓	✓	✓	✓	✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓		✓		✓		✓		✓		✓		✓		✓					
	BRASS BUSHES		✓		✓		✓		✓		✓		✓		✓		✓				
	S.S. BEARING																✓	✓	✓	✓	✓
MECHANISM	G.I. LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓	✓							✓	✓	✓		
	PLASTIC GEARS											✓	✓	✓	✓	✓				✓	✓
FIXING TO DUCT	HAT-SHAPED	✓	✓							✓							✓				✓
	FLANGE			✓	✓							✓	✓				✓				
	SLIP & CLIP					✓	✓							✓	✓					✓	
	BOX TYPE (INSERTED INSIDE DUCT)							✓	✓							✓					✓


**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.






VOLUME CONTROL DAMPER - AVCD SERIES AEROFOIL BLADES

STEEL BLADES OPTIONS



FEATURE	MODEL	MANUAL QUADRANT MODELS																			
		AGVCDG2PLH	AGVCDG2BLH	AGVCDG2PLF	AGVCDG2BLF	AGVCDG2PLS	AGVCDG2BLS	AGVCDG2PLB	AGVCDG2BLB	AGVCDG2PGH	AGVCDG2BGH	AGVCDG2PGF	AGVCDG2BGF	AGVCDG2PGS	AGVCDG2BGS	AGVCDG2PGB	AGVCDG2BGB	AGVCDG2SLH	AGVCDG2SLF	AGVCDG2SLS	AGVCDG2SLB
DRIVE	MANUAL QUADRANT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ELECTRIC ACTUATOR																				
BLADE TYPE	G.I. AEROFOIL BLADES	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL AEROFOIL																✓	✓	✓	✓	✓
BLADE MOVEMENT	OPPOSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PARALLEL	ABOVE MODELS (EXCEPT THE ONES WITH GEAR MECHANISM) CAN BE WITH PARALLEL BLADES, PLS. WRITE "PARALLEL" ON YOUR ORDER																			
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUT OFF)																				
FRAME CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL 304																✓	✓	✓	✓	✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓		✓		✓		✓		✓		✓		✓		✓					
	BRASS BUSHES		✓		✓		✓		✓		✓		✓		✓						
	S.S. BEARING																✓	✓	✓	✓	✓
MECHANISM	STEEL LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓												
	PLASTIC GEARS											✓	✓	✓	✓	✓				✓	✓
FIXING TO DUCT	HAT-SHAPED	✓	✓							✓	✓						✓				✓
	FLANGE			✓	✓							✓	✓				✓				✓
	SLIP & CLIP					✓	✓							✓	✓					✓	
	BOX TYPE (INSERTED INSIDE DUCT)							✓	✓							✓	✓				✓

**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.



FEATURE	MODEL	MOTORIZED MODELS																			
		MAGVCDG2PLH	MAGVCDG2BLH	MAGVCDG2PLF	MAGVCDG2BLF	MAGVCDG2PLS	MAGVCDG2BLS	MAGVCDG2PLB	MAGVCDG2BLB	MAGVCDG2PGH	MAGVCDG2BGH	MAGVCDG2PGF	MAGVCDG2BGF	MAGVCDG2PGS	MAGVCDG2BGS	MAGVCDG2PGB	MAGVCDG2BGB	MAGVCDG2SLH	MAGVCDG2SLF	MAGVCDG2SLS	MAGVCDG2SLB
DRIVE	MANUAL QUADRANT																				
	ELECTRIC ACTUATOR	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BLADE TYPE	G.I. AEROFOIL BLADES	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL AEROFOIL																✓	✓	✓	✓	✓
BLADE MOVEMENT	OPPOSED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PARALLEL	ABOVE MODELS (EXCEPT THE ONES WITH GEAR MECHANISM) CAN BE WITH PARALLEL BLADES, PLS. WRITE "PARALLEL" ON YOUR ORDER																			
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUT OFF)																				
FRAME CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	STAINLESS STEEL 304																✓	✓	✓	✓	✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓		✓		✓		✓		✓		✓		✓		✓					
	BRASS BUSHES		✓		✓		✓		✓		✓		✓		✓						
	S.S. BEARING																✓	✓	✓	✓	✓
MECHANISM	STEEL LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓												
	PLASTIC GEARS											✓	✓	✓	✓	✓				✓	✓
FIXING TO DUCT	HAT-SHAPED	✓	✓							✓	✓						✓				✓
	FLANGE			✓	✓							✓	✓				✓				✓
	SLIP & CLIP					✓	✓							✓	✓					✓	
	BOX TYPE (INSERTED INSIDE DUCT)							✓	✓							✓	✓			✓	

**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.





VOLUME CONTROL DAMPER - AVCD SERIES

AEROFOIL BLADES BLADES

PERFORMANCE DATA

Beta Industrial LLC certifies that the AVCD shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings only.

Test Information

- * Air leakage is based on operation between 32 °F and 120 °F
- * Tested for air leakage at standard air density in accordance with ANSI/AMCA Standard 500-D-18, Figure 5.4 Aletrnate
- * Tested for air performance at standard air density in accordance with ANSI/AMCA 500-D-18, Figure 5.5
- * Data are based on a torque of 36 in-lb/ft² applied to close and seat the damper during the test.



PRESSURE DROP DATA

Size 12" x 12"		Size 12" x 24"		Size 24" x 12"		Size 24" x 24"	
Air Velocity (fpm)	Pressure Drop (in.wg)	Air Velocity (fpm)	Pressure Drop (IWG)	Air Velocity (fpm)	Pressure Drop (IWG)	Air Velocity (fpm)	Pressure Drop (in.wg)
1948	0.524	5225	4.256	5246	4.107	2672	1.113
1459	0.295	4464	3.107	4468	2.960	1981	0.608
970	0.131	3480	1.898	3484	1.784	1484	0.341
725	0.073	1983	0.598	1982	0.565	987	0.15
300	0.010	693	0.071	690	0.063	345	0.017

AIR LEAKAGE DATA

Size 12" x 12"		Size 12" x 24"		Size 24" x 12"		Size 24" x 24"	
Leakage Face Area (cfm/ft ²)	Pressure Drop (in.wg)	Leakage Face Area (cfm/ft ²)	Pressure Drop (in.wg)	Leakage Face Area (cfm/ft ²)	Pressure Drop (in.wg)	Leakage Face Area (cfm/ft ²)	Pressure Drop (in.wg)
79.3	4.096	30.1	3.084	57.1	4.114	86.3	4.171
68.1	3.073	25.4	2.057	49.3	3.087	71.3	3.13
62.2	2.562	21.8	1.544	41.3	2.06	54.5	2.088
55.4	2.049	17.7	1.031	29.4	1.032	35.1	1.047
38.7	1.024	12.4	0.518	20.6	0.519	23.7	0.526

Maximum Allowable Leakage, cfm/ft²

Pressure Class	1.0" W.G	4" W.G	8" W.G
1A	3	N/A	N/A
1	4	8	11
2	10	20	28
3	40	80	112

	Width	Height
Minimum	4"	4" *
Maximum	48"	48"



* Minimum height for Hat-shaped type is 6" (150mm)





VOLUME CONTROL DAMPER - AVCD SERIES AEROFOIL BLADES

PERFORMANCE DATA

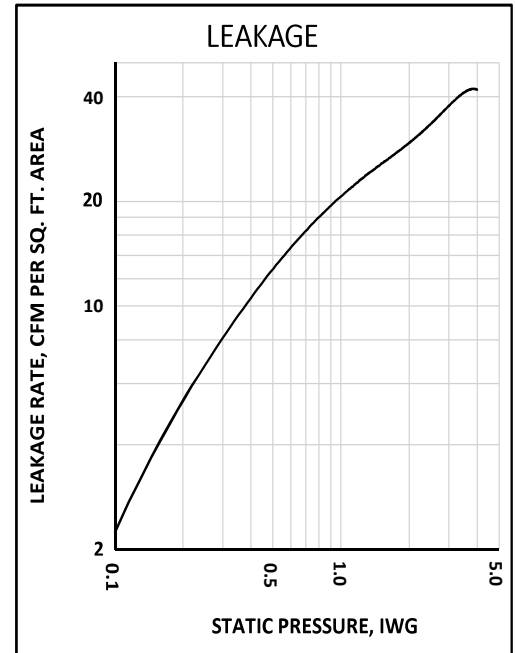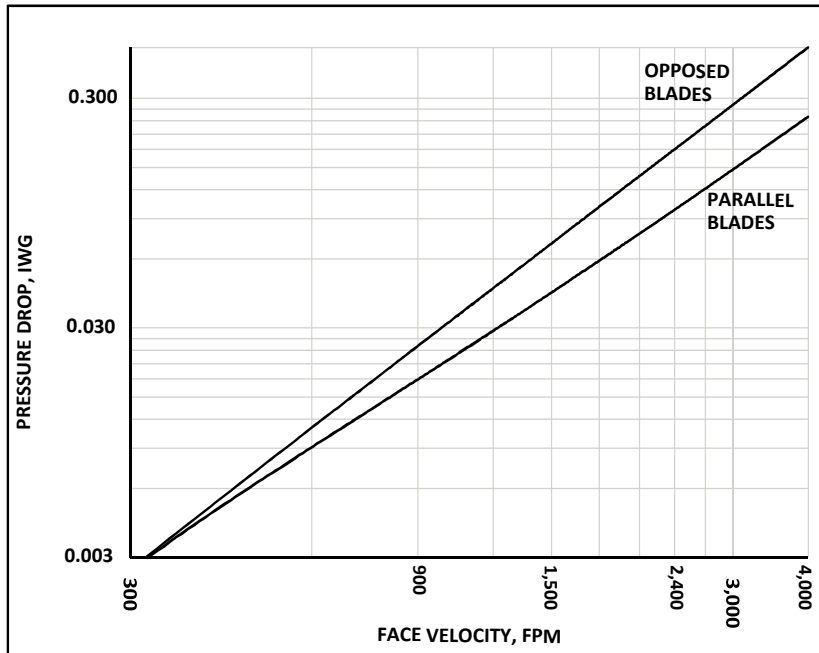

Ordering Key:

M	AU	VCD	G2	P	L	F	SIZE
--- : QUADRANT DRIVEN M: MOTORIZED AU: AEROFOIL ALUMINUM BLADES AG: AEROFOIL STEEL BLADES VCD: VOLUME CONTROL DAMPER G1: 0.9MM G.I.CONSTRUCTION G2: 1.2MM G.I.CONSTRUCTION (STANDARD) G3: 1.5MM G.I.CONSTRUCTION G4: 1.7MM G.I.CONSTRUCTION S1: 1.0MM S.S. 304 CONSTRUCTION S2: 1.2MM S.S. 304 CONSTRUCTION S3: 1.5MM S.S. 304 CONSTRUCTION S4: 1.7MM S.S. 304 CONSTRUCTION P: PLASTIC NYLON BUSHES B: BRASS BUSHES X: S.S. BUSHES S: S.S. BEARINGS L: STEEL LINKAGE MECHANISM (STANDARD) G: PLASTIC GEARS MECHANISM H: HAT-SHAPED FRAME F: FLANGED TO DUCT (STANDARD) S: SLIP & CLIP WITH DUCT B: BOX TYPE (INSERTED INSIDE DUCT) SIZE: WIDTH X HEIGHT Single section minimum size: 100X100mm for Flanged/Box/Slip & clip types. 100X150mm for Hat-shaped types.							
Single section maximum size: 1200X1200mm for Hat-shaped/Flanged types. 1000X1000mm for Slip & Clip/ Box types.							





LOW-LEAKAGE VOLUME CONTROL DAMPER - LVCD SERIES 3V-SHAPED STEEL BLADES

STANDARD CONSTRUCTION

Frame: 133mm Roll formed hat-shaped made of 1.2mm thick galvanized steel with reinforced corners, having integral bracing and 90° perpendicular overlap at a corner.

Blades: Roll formed 3 V-shaped made of 1.2mm thick galvanized steel.

Bushes: Brass bushes.

Axles: 1/2" Square axles made of galvanized steel.

Linkage: Mechanical and concealed in frame.

Jamb Seals: Stainless steel jamb seals.

Blades Seal: Silicone blades edges seal/gasket.

Leakage: Class I

Air Flow Rating: 2000 FPM / 4 IWG.

Single section minimum size:

150X150mm for Hat-shaped/Flanged types.

Single section maximum size:

1200X1200mm for Hat-shaped/Flanged types.


Model LVCDG2BLH




Model MLVCDG2BLH



DIMENSIONS

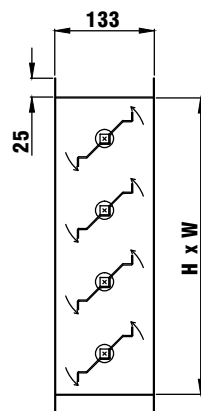

LVCD-Flange type

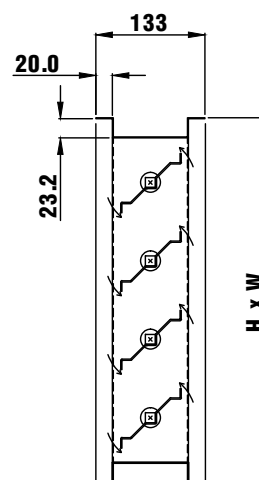


LVCD-Hat type






LOW-LEAKAGE VOLUME CONTROL DAMPER - LVCD SERIES 3V-SHAPED STEEL BLADES

OPTIONS



FEATURE	MODEL	MANUAL QUADRANT MODELS									
		LVCDG2PLH	LVCDG2BLH	LVCDG2XLH	LVCDG2PLF	LVCDG2BLF	LVCDG2XLF	LVCDG2SLH	LVCDG2SLF	LVCDG2-SCM	LVCDG2-SMC
DRIVE	MANUAL QUADRANT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ELECTRIC ACTUATOR										
BLADE TYPE	G.I. 3V-SHAPED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ALUMINUM AEROFOIL										
BLADE MOVEMENT	OPPOSED										
	PARALLEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE APPLICATIONS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓				✓	
	STAINLESS STEEL 304						✓	✓	✓		✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓			✓						
	BRASS BUSHES		✓			✓				✓	
	S.S. BUSHES			✓			✓				
	S.S. BEARING							✓	✓		✓
MECHANISM	G.I. LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PLASTIC GEARS										
FIXING TO DUCT	HAT-SHAPED	✓	✓	✓				✓		✓	✓
	FLANGE				✓	✓	✓		✓		
	SLIP & CLIP										
	BOX TYPE (INSERTED INSIDE DUCT)										



FEATURE	MODEL	MOTORISED MODELS									
		MLVCDG2PLH	MLVCDG2BLH	MLVCDG2XLH	MLVCDG2PLF	MLVCDG2BLF	MLVCDG2XLF	MLVCDG2SLH	MLVCDG2SLF	MLVCDG2-SMC	MLVCDG2-SMC
DRIVE	MANUAL QUADRANT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ELECTRIC ACTUATOR										
BLADE TYPE	G.I. 3V-SHAPED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ALUMINUM AEROFOIL										
BLADE MOVEMENT	OPPOSED										
	PARALLEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE APPLICATIONS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓	✓	✓			✓	
	STAINLESS STEEL 304							✓	✓		✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓			✓						
	BRASS BUSHES		✓			✓				✓	
	S.S. BUSHES			✓			✓				
	S.S. BEARING							✓	✓		✓
MECHANISM	G.I. LINKAGE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	PLASTIC GEARS										
FIXING TO DUCT	HAT-SHAPED	✓	✓	✓				✓		✓	✓
	FLANGE				✓	✓	✓		✓		
	SLIP & CLIP										
	BOX TYPE (INSERTED INSIDE DUCT)										






LOW-LEAKAGE VOLUME CONTROL DAMPER - LVCD SERIES

3V-SHAPED STEEL BLADES

PERFORMANCE DATA

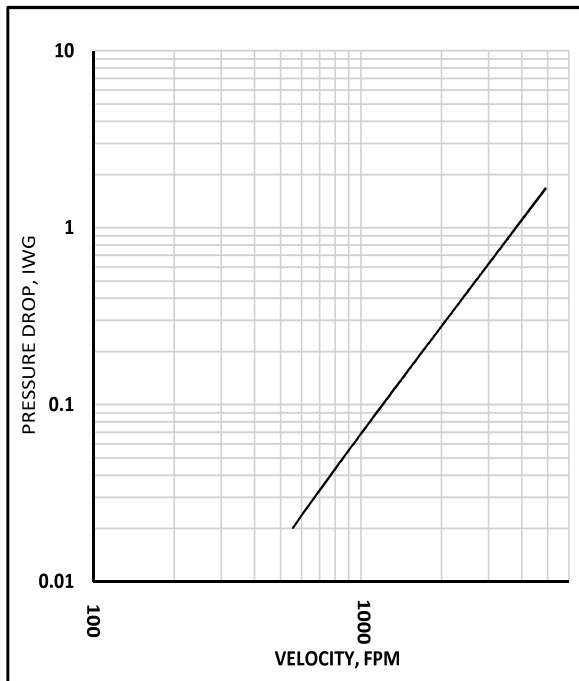

Note:

Pressure drop test was done at an independent laboratory in accordance with the AMCA 500-D standard on 36"X36" sample.

Maximum Leakage, cfm/ft ²			
Pressure Class	1.0" W.G	4" W.G	8" W.G
1	4	8	11



Ordering Key:

M	L	VCD	G2	B	L	H	SIZE
—: QUADRANT-DRIVEN M: MOTORIZED L: 3V-SHAPED G.I. BLADES LOW-LEAKAGE TYPE VCD: CONTROL DAMPER G1: 0.9MM G.I. CONSTRUCTION G2: 1.2MM G.I. CONSTRUCTION (STANDARD) G3: 1.5MM G.I. CONSTRUCTION G4: 1.7MM G.I. CONSTRUCTION S1: 1.0MM S.S. 304 CONSTRUCTION S2: 1.2MM S.S. 304 CONSTRUCTION S3: 1.5MM S.S. 304 CONSTRUCTION S4: 1.7MM S.S. 304 CONSTRUCTION P: PLASTIC BUSHES B: BRASS BUSHES X: S.S. BUSHES S: S.S. BEARINGS L: G.I LINKAGE MECHANISM (STANDARD) H: HAT-SHAPED FRAME (STANDARD) F: FLANGED TO DUCT SIZE: WIDTH X HEIGHT Single section minimum size: 150X150mm for Hat-shaped/Flanged types.							
Single section maximum size: 1200X1200mm for Hat-shaped/Flanged types.							





ROUND VOLUME CONTROL DAMPER - VDR MODEL STEEL BLADE

STANDARD CONSTRUCTION

Frame: 0.9mm thick galvanized steel sheet.

Blades: 0.9mm thick galvanized steel sheet.

Axles: 1/2" square hollow Aluminum extruded profile.

Bushing: Self lubricating plastic bushes.

Quadrant: Plated steel with wing nut to lock the blades position.
Marked to show the position of the blades.

Seal: Foam gasket.


Sizes: 4, 5, 6, 8, 10, 12 inch diameter (AMCA certified).

Diameters 14 inch and above are available up on request.



Plastic Bushes

OPTIONAL DIMENSIONS

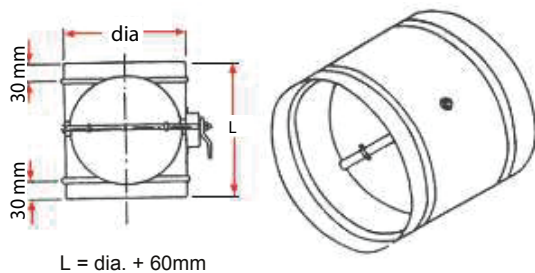


Model VDRG2P



Model MVDRG2P



STANDARD DIMENSIONS

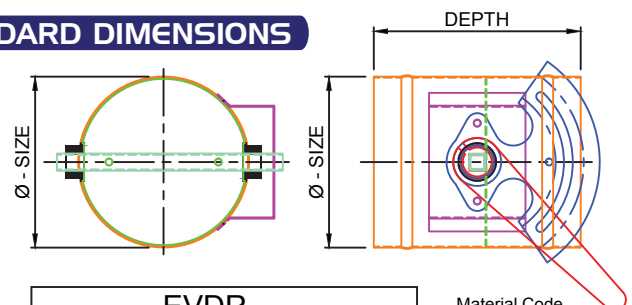

EVDR		
	Ø - Size (mm)	Depth
1	100 - 125	120 mm
2	Above 125 - 200	150 mm
3	Above 200 - 300	180 mm
4	Above 300	250 mm

Material Code

G0.8 - GI 0.8 mm

S0.8 - SS 0.8 mm

Other thickness optional





ROUND VOLUME CONTROL DAMPER - VDR MODEL STEEL BLADE

OPTIONS

FEATURE	MODEL	MANUAL QUADRANT MODELS								MOTORIZED MODELS							
		VDRG2P	VDRG2B	VDRG2X	VDRG2S	VDRS2X	VDRS2S	VDRG2-SMC	VDRS2-SMC	MVDRG2P	MVDRG2B	MVDRG2X	MVDRG2S	MVDRS2X	MVDRS2S	MVDRG2-SMC	MVDRS2-SMC
DRIVE	MANUAL QUADRANT	✓	✓	✓	✓	✓	✓	✓	✓								
	ELECTRIC ACTUATOR									✓	✓	✓	✓	✓	✓	✓	✓
BLADE TYPE	SINGLE SKIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
USE	CONTROL (AIR BALANCING)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	LOW LEAKAGE (AIR TIGHT SHUTT OFF)																
CONSTRUCTION	GALVANIZED STEEL	✓	✓	✓	✓			✓		✓	✓	✓	✓			✓	
	STAINLESS STEEL 304					✓	✓		✓					✓	✓		✓
BUSHING/ BEARING TYPE	PLASTIC NYLON BUSHES	✓								✓							
	BRASS BUSHES		✓					✓	✓		✓					✓	✓
	S.S. BUSHES			✓		✓						✓		✓			
	S.S. BEARING				✓		✓						✓		✓		

**Other options of S.S. bushes "X" and S.S. bearing "S" are shown at the ordering key.



Ordering Key:

M	V	EV	DR	G2	P	SIZE
---: QUADRANT-DRIVED M: MOTORIZED V: SINGLE SKIN BLADE EV: STANDARD SINGLE SKIN BLADE DR: CONTROL DAMPER ROUND TYPE G1: 0.7MM G.I. CONSTRUCTION G2: 0.9MM G.I. CONSTRUCTION (STANDARD) G3: 1.2MM G.I. CONSTRUCTION G4: 1.5MM G.I. CONSTRUCTION S1: 0.8MM S.S. 304 CONSTRUCTION S2: 1.0MM S.S. 304 CONSTRUCTION S3: 1.2MM S.S. 304 CONSTRUCTION P: PLASTIC NYLON BUSHES (STANDARD) B: BRASS BUSHES X: S.S. BUSHES S: S.S. BEARINGS SIZE: DIAMETER OF 4, 5, 6, 8, 10, 12, 14, 16, 18, 20, 22 or 24						





ROUND VOLUME CONTROL DAMPER - VDR MODEL STEEL BLADE

PERFORMANCE DATA

Beta Industrial LLC certifies that the VDR shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings.

Test Information

* Air leakage is based on operation between 32 °F and 120 °F


* Tested for air leakage at standard air density in accordance with ANSI/AMCA Standard 500-D, Figure 5.4

* Tested for air performance at standard air density in accordance with ANSI/AMCA 500-D, Figure 5.3

* Data are based on a torque of 49 in-lb/ft² applied to close and seat the damper during the test.



AIR PERFORMANCE DATA

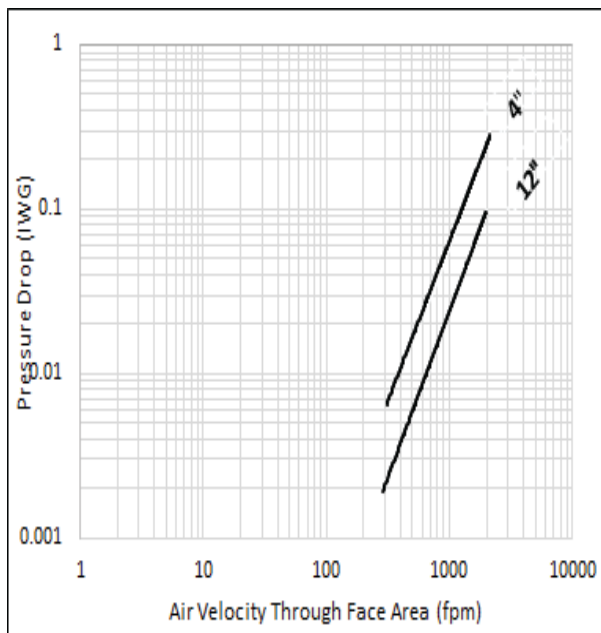

AIR LEAKAGE DATA

Damper Dia	Leakage Class			
	0.5 in.wg	1 in.wg	2 in.wg	4 in.wg
4"	1	1A	1	1
12"	3	3	3	3

Maximum Allowable Leakage, cfm/ft ²			
Pressure Class	1.0" W.G	4" W.G	8" W.G
1A	3	N/A	N/A
1	4	8	11
2	10	20	28
3	40	80	112





NON-RETURN DAMPER - MODEL NRD

STANDARD CONSTRUCTION

Frame: 0.9mm thick galvanized steel.

Blades: 1.0mm thick extruded Aluminum profiles.

Bushing: Brass bushes.

Axles: Round extruded Aluminum profiles.

Seal: Foam blades seals.

Size: Single section up to 600 X 600mm.

OPTIONS


FEATURE	MODEL				
		NRD	NRD-CR	NRDE	NRDE-CR
BRASS BUSHES	YES	✓	✓		
	NO			✓	✓
CONNECTING ROD	YES		✓		✓
	NO	✓		✓	
COUNTERWEIGHT	NO	✓	✓	✓	✓
FLANGES	2 SIDES	✓	✓	✓	✓
FINISH	MILL FINISH	✓	✓	✓	✓
INSTALLATION	2-SIDES DUCTED	✓	✓	✓	✓
APPLICATION	DISCHARGE & INTAKE	✓	✓	✓	✓

Model NRD-CR



DIMENSIONS

DUCTED NON RETURN DAMPER NRD MODEL:

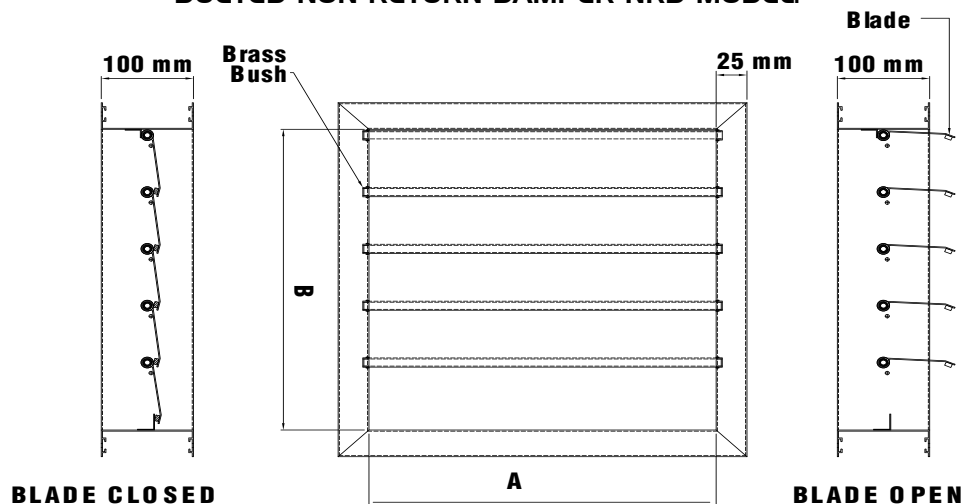



NON-RETURN DAMPER - MODEL NRD

PERFORMANCE DATA

Beta Industrial LLC certifies that the NRD-CR shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings.

Test Information


Air leakage is based on operation between 32 °F and 120 °F

Tests were conducted at standard air density in accordance with ANSI/AMCA Standard 500-D, Figure 5.4 for Air Leakage & Fig 5.5 for Pressure drop, on a 24 in. x 24 in. sample.


Air Performance testing conducted in accordance with ANSI/AMCA Standard 500-D, Figure 5.4 for Air Leakage & Fig 5.5 for Pressure drop.



AIR LEAKAGE DATA

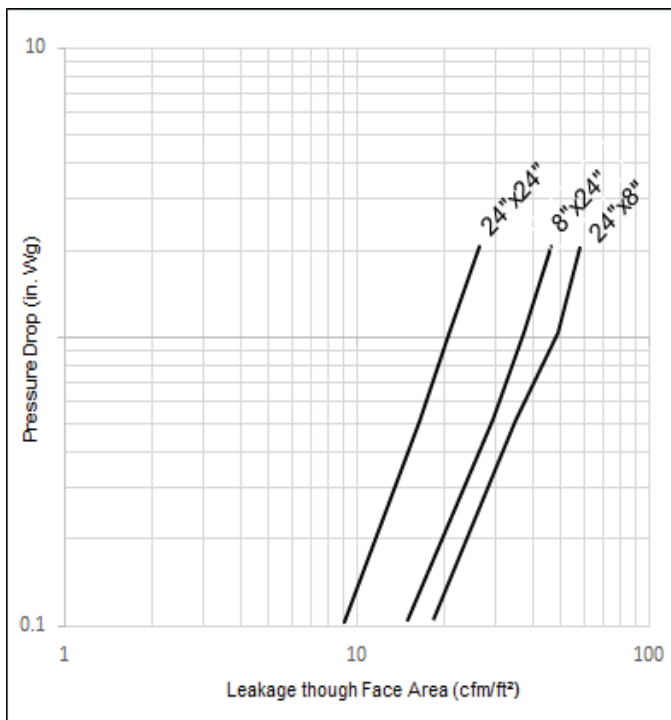

AIR PERFORMANCE DATA

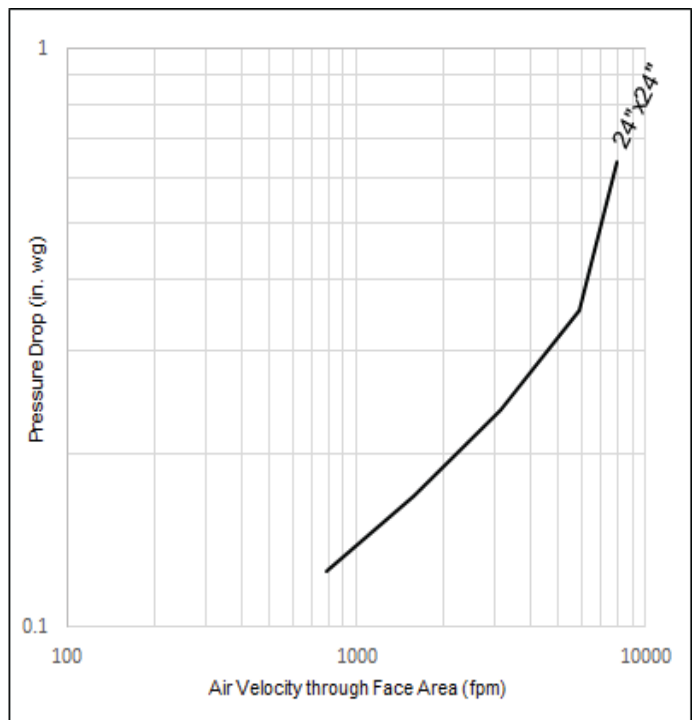

Ordering Key:



N	R	D	E	CR	W	X	H
NRD: NON-RETURN DAMPER WITH BRASS BUSHES							
NRD-CR: NON-RETURN DAMPER WITH BRASS BUSHES & CONNECTING ROD							
NRDE: NON-RETURN DAMPER WITHOUT BRASS BUSHES							
NRDE-CR: NON-RETURN DAMPER WITHOUT BRASS BUSHES WITH CONNECTING ROD							
SIZE: WIDTH X HEIGHT							





PRESSURE RELIEF DAMPER - MODEL PRD

STANDARD CONSTRUCTION

PRD:

Frame: 0.9mm thick galvanized steel.
 Blades: 1.0mm thick extruded Aluminum profiles with adjustable counterweight for fine-tune operation.
 Axles: Round extruded Aluminum profiles.
 Bushing: Brass bushes.
 Seal: Foam blades seals.
 Size: Single section up to 1200 X 1200mm.

DPRD & IPRD:

Frame: 1.2mm thick extruded Aluminum profiles.
 Blades: 1.0mm thick extruded Aluminum profiles with adjustable counterweight for fine-tune operation.
 Axles: Round extruded Aluminum profiles.
 Bushing: Brass bushes.
 Seal: Foam blades seals.
 Size: Single section up to 1200 X 1200mm.

Model PRD



OPTIONS


FEATURE	MODEL			
		PRD	DPRD	IPRD
BRASS BUSHES	YES	✓	✓	✓
BLADES CONNECTING	YES	✓	✓	✓
COUNTERWEIGHT	YES	✓	✓	✓
FLANGES	1 SIDE		✓	✓
	2 SIDES	✓		
FINISH	MILL FINISH	✓		
	POWDER COATED TORAL9010/9016		✓	✓
INSTALLATION	2-SIDES DUCTED	✓		
	WALL-MOUNTED		✓	✓
APPLICATION	DISCHARGE		✓	
	INTAKE			✓

Model DPRD



DIMENSIONS

DUCTED PRESSURE RELIEF DAMPER PRD MODEL:

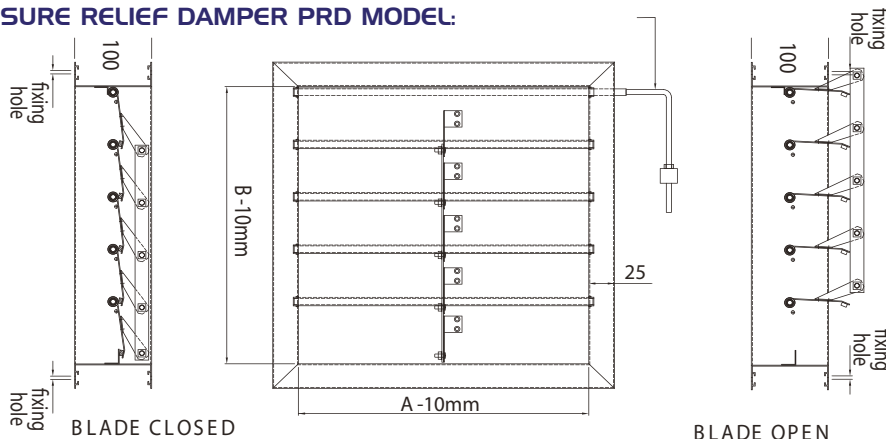


OPTION: PRD MODELS CAN BE MADE OF 1.2MM THICK ALUMINUM FRAME INSTEAD OF STEEL FRAME. OTHER COMPONENTS REMAIN AS STANDARD CONSTRUCTION.






DIMENSIONS

DISCHARGE/INTAKE WALL-MOUNTED PRESSURE RELIEF DAMPER DPRD MODEL:

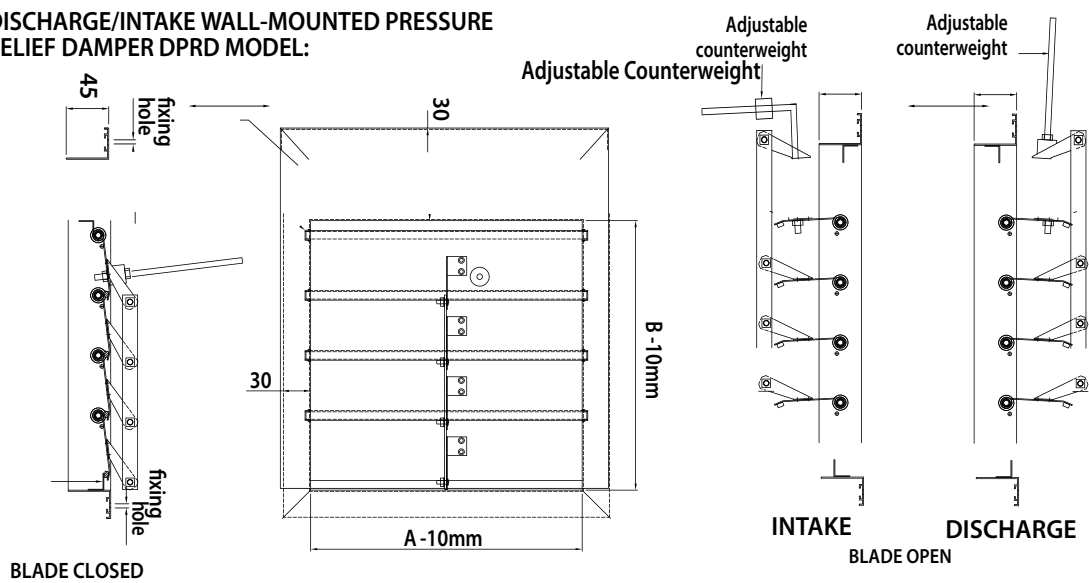

FOR PRD MODELS:

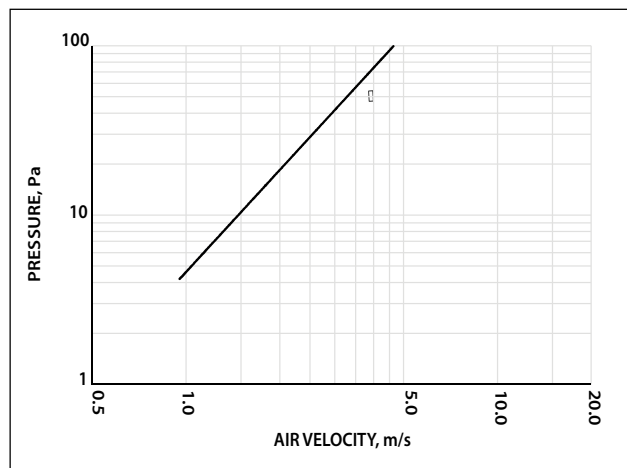

Ordering Key:



P	R	D	W	X	H
PRD: DUCTED PRESSURE RELIEF DAMPER					
DPRD: DISCHARGE WALL-MOUNTED PRESSURE RELIEF DAMPER					
IPRD: INTAKE WALL-MOUNTED PRESSURE RELIEF DAMPER					
SIZE: WIDTH X HEIGHT					





MOTORIZED PRESSURE RELIEF DAMPER - MODEL MPRD

STANDARD CONSTRUCTION

DESCRIPTION

Frame: 1.2mm thick galvanized steel.

Blade: 3-V shaped 1.2mm thick roll formed galvanized steel.

Axels: 1/2" square galvanized steel rod.


Bushing: Plastic Nylon Bushes / Brass Bushes

Size: Single section upto = 1200X1200 mm

Multiple section upto = 2400 X 2400 mm



DIMENSIONS

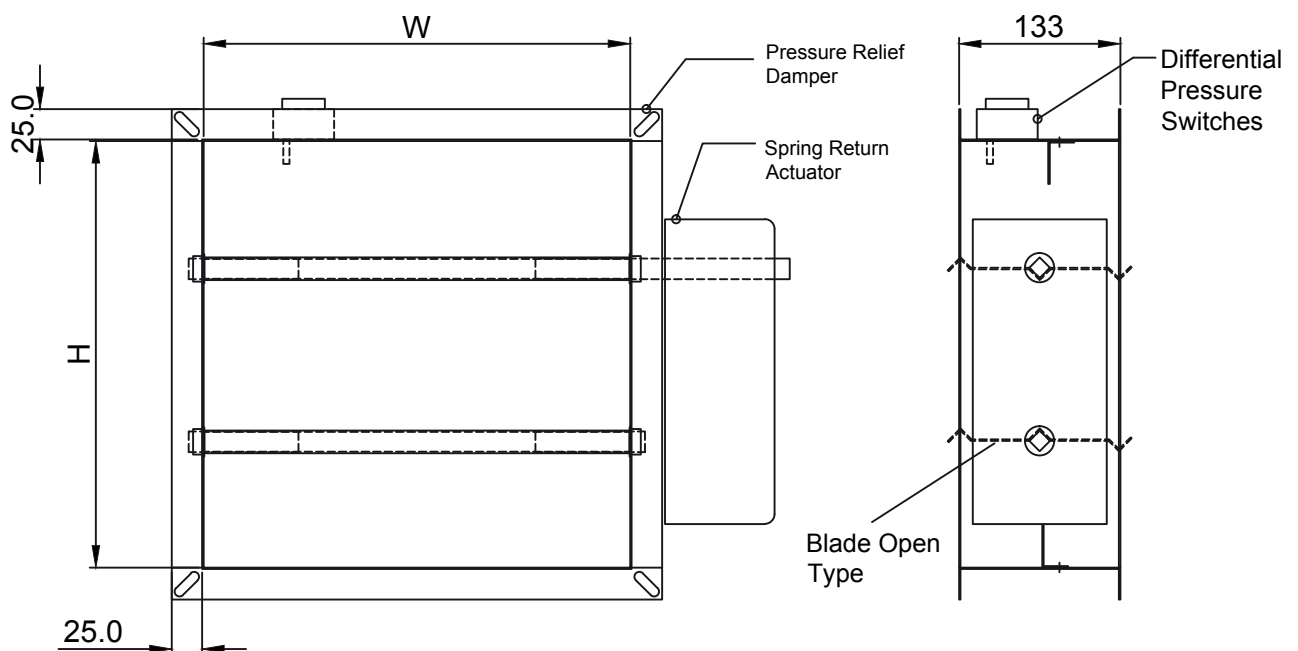



MOTORIZED PRESSURE RELIEF DAMPER - MODEL MPRD

DIFFERENTIAL PRESSURE SWITCH

Differential Pressure Switches DPS Series

FOR AIR CONDITIONING / VENTILATION, USER-ADJUSTABLE

PRODUCT DATA AND INSTALLATION INSTRUCTIONS



TECHNICAL SPECIFICATIONS

Max. operating pressure	10 kPa
Pressure media	air, non-flammable gases, and non-aggressive gases
Pressure connections	two plastic tubes, outside diameter: 6.0 mm
Switching capacity	1.5 A, (0.4) /250 Vac
Electrical connections	AMP connectors, 6.3 x 0.8, DIN 46244 or screw terminals
Conduit entry	M20x1.5
Protection class	IP 54
Mounting lugs	integrated in bottom housing (alternative: mounting angles)
Medium/ambient temp.	-20...+85 °C
Storage temperature	-40...+85 °C
Membrane material	silicone

BENEFITS

- Switching-point easily adjustable with scale in Pascal;
- Direction of M20x1.5 conduit entry can be rotated in steps of 120°;

APPROVALS

- CE approval according to low-voltage directive 2006/95/EC;
- Switch according to VDE 0630;
- EC Gas Appliance Directive 90/396/EEC according to DIN EN 1854 (Nov. 01, 1997)
- ROHS 2002/95/EC

OPERATING RANGES

type	adjustment range for upper trip pressure*	switching difference (hysteresis)	tolerance at adjusted switch-point
DPS 200	20...200 (Pa)	10 (Pa)	±20%

*The trip pressure refers to vertical mounting. In case of horizontal mounting (with the cover pointing upwards), the range values increase by 20 Pa.

Ordering Key:

M	P	R	D	G2	P/B
M: MOTORIZED				G2 = 1.2 mm GI Blade G3 = 1.5 mm GI Blade G4 = 1.7 mm GI Blade	
PRD - Pressure Relief Damper					
G2 = 1.2 mm GI Blade G3 = 1.5 mm GI Blade G4 = 1.7 mm GI Blade					
P - Plastic Nylon Bushes B - Brass Bushes					





ACCG2I12L



ACCG2I1PH






ACCG2I1PHLK

Description:




- Made of 1.2mm thick galvanized steel.
- Contain 1" thick glass fiber insulation of 24kg/m^3 (2" optional).
- Provided with gasket between door & frame.
- For closure, equipped with one of the following alternatives.
 - 2 cam locks (standard)
 - 1 cam lock & Piano-hinge.
 - Piano-hinge & handle operated lock with key.

Dimensions :




ACCESS DOOR WITH 2 CAM LOCKS

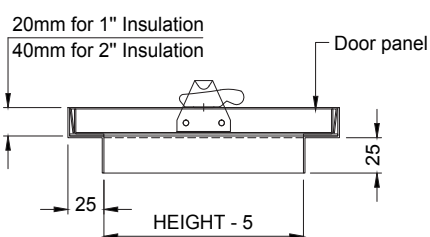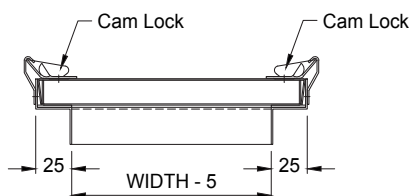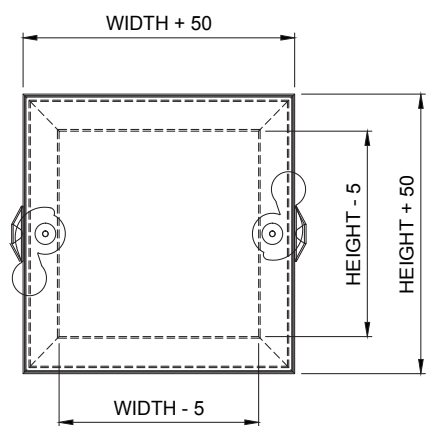

ACCESS DOOR WITH A CAM LOCK & PIANO HINGE

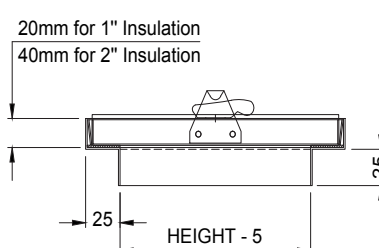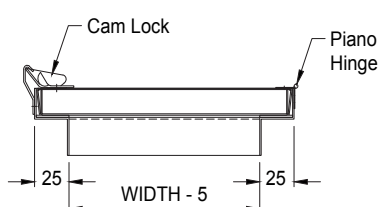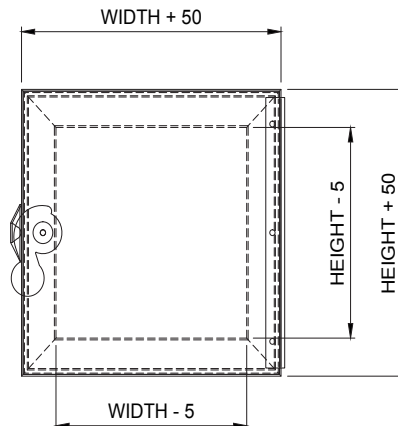

ACCESS DOOR WITH A HANDLE OPERATED LOCK & PIANO HINGE

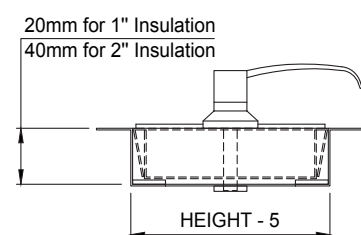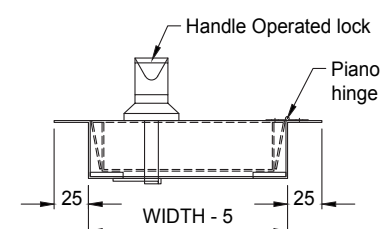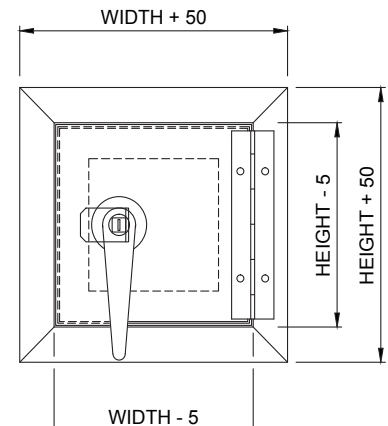




OPTIONS

DRAWER-TYPE
HANDLE


CAM LOCK

SEPARATE
BUTT HINGES

ACCG2I12LD

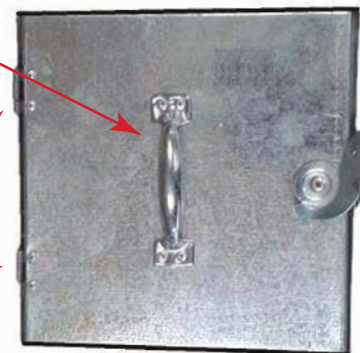

ACCG2I1SHD

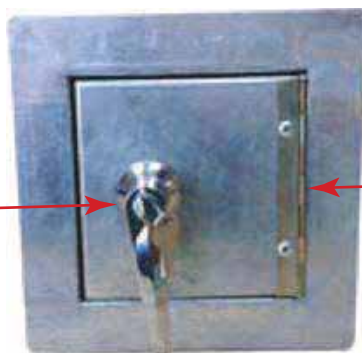HANDLE
OPERATED
LOCK WITH
KEYPIANO
HINGE

ACCG2I1PHLK



Ordering Key:

A	C	C	G2	I1	P	H	L	K	W	X	H
ACCESS DOOR											
G0: 0.7MM G.I. CONSTRUCTION											
G1: 0.9MM G.I. CONSTRUCTION											
G2: 1.2MM G.I. CONSTRUCTION (STANDARD)											
G3: 1.5MM G.I. CONSTRUCTION											
I1: 1" INSULATION THICKNESS (STANDARD)											
I2: 2" INSULATION THICKNESS (OPTIONAL)											
2L: WITH 2 CAM LOCKS (STANDARD)											
2LD: WITH 2 CAM LOCKS & DRAWER - TYPE HANDLE											
PH: WITH PIANO HINGE AND A CAM LOCK											
PHD: WITH PIANO HINGE, A CAM LOCK & DRAWER - TYPE HANDLE											
SH: WITH SEPARATE HINGES & A CAM LOCK											
SHD: WITH SEPARATE HINGES, A CAM LOCK & DRAWER - TYPE HANDLE											
PHLK: WITH PIANO HINGES & HANDLE OPERATED LOCK WITH A KEY											
SHLK: WITH SEPARATE BUTT HINGES & HANDLE OPERATED LOCK / KEY											
SIZE: WIDTH X HEIGHT											





BETA
i n d u s t r i a l

Dubai Head Office:
Tel: +971 4 706 9777
Fax: +971 4 706 9787

Abu Dhabi Branch:
Tel: +971 2 645 0107
Fax: +971 2 645 0167

Saudi Arabia:
Tel: +966 1 265 4551
Fax: +966 1 265 4550

Email: betai@betag.com
P.O.Box 50708, Dubai
United Arab Emirates

www.betag.com

